


型号/TYPE	A	B	C	D	E	F	G	H	I	SW
KVRDE-G1/4	115	68	G1/4	38	∅7	7	40	30	13	24
KVRDE-G3/8	139	80	G3/8	40	∅8.5	15	50	40	16	27
KVRDE-G1/2	173	90	G1/2	40	∅8.5	15	60	40	20	30

符号/SYMBOL:

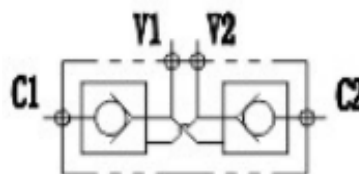

技术参数/TECHNICAL DATA:

应用材料/MATERIAL EMPLOYED

阀体/BODY: 钢/STEEL

阀芯/VALVES: 钢/STEEL

密封/SEALS: 丁腈胶/NBR

温度/TEMPERATURES

理想工作温度: +40°C~+70°C


Ideal operating range between +40°C and +70°C

最低/最高环境温度: -20°C~+60°C


Min/Max environment temps -20°C~and

最高工作温度: 90°C/Max operating temperature 90°C

外形尺寸/OVER DIMENSION:

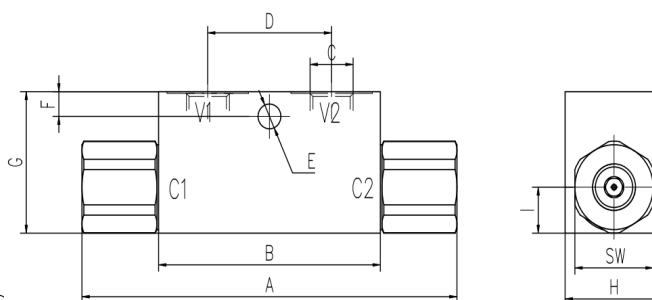



型号说明/MODEL CODE:

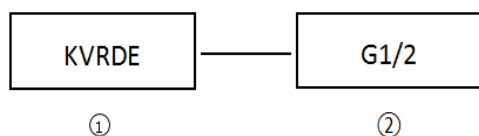

① 双向液压锁系列代号/double pilot check valve

② 阀体连接螺纹形式/connect thread dimension:BBSP

流量曲线图/FLOW DIAGRAM:

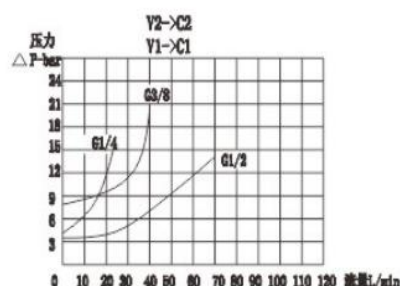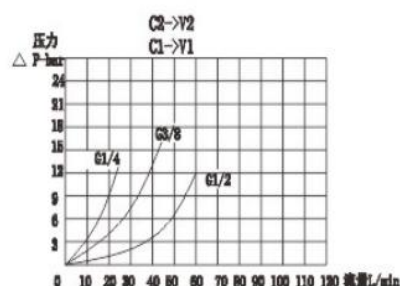

型号/TYPE	最大压力 (bar)		最大流量 (L/min)	先导比 (pilot ratio)	开启压力 (cracking pressure) (bar)
	钢/steel	铝/aluminum			
KVRDE-G1/4	350	200	20	4.5:1	3.5
KVRDE-G3/8			50	4:1	
KVRDE-G1/2	300	80			