

技术参数/TECHNICAL DATA:

应用材料/MATERIAL

阀体/BODY: 钢

阀芯/VALVES: 硬质钢/Hardened

温度/TEMPERATURES

理想工作温度: +40°C~+70°C

Ideal operating range between +40°C and +70°C

最低/最高环境温度: -20°C~+60°C

Min/Max environment temps -20°C~and


最高工作温度: 90°C/Max operating

适用工作环境/OPERATIONAL

安装/MOUNTING

按需/as preferred

型号说明/MODEL CODE:




①背压阀系列代号/back pressure valve series code :BPV型/BPV type

②连接螺纹尺寸/connect thread

③开启压力/opening pressure

外形尺寸/OVER DIMENSION:

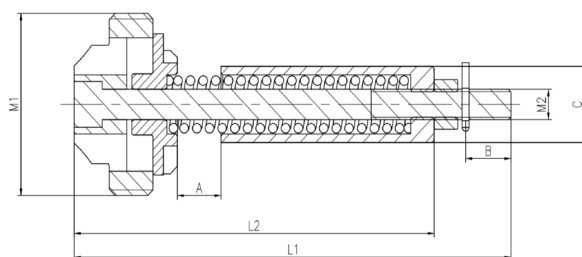

应用

通过调节阀门的开度，使管道中的压力保持在一定范围内，防止回流现象的发生。/By adjusting the opening of the valve, the pressure in the pipeline is maintained within a certain range to prevent backflow phenomenon from occurring.

型号/TYPE	L1	L2	M1	M2	A	B	C
BPV-08-4	91	70	G1	M6	8	14	16.5
BPV-12-3	125	100.5	G1-1/2	M8	12.5	13	20
BPV-18-4.5	188	159	G2	M10	29	12	30
BPV28-3	113	96	G1-1/4	M8	9	8	20
BPV-10-4.5	125	105.7	G1-1/4	M8	18.7	8	20
BPV-06-1.5	57	43.8	G3/4	M6	26.8	3	11.5