


订货代号 TO ORDER

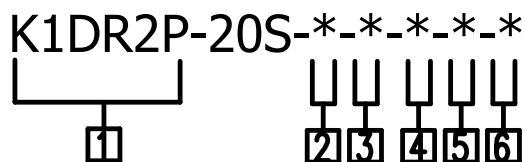

1 功能

K1DR2P= 直动式溢流阀
Direct-Acting Relief Valve

2 流量 Flow

A=1L/min

3 控制方式 Control

L= 标准螺钉调节
Standard Screw Adjustment
K= 调节手轮 Handknob

5 油封 Seal Kits

N=Buna N
V=Viton

4 弹簧调压范围 Spring Ranges

A=25-3000psi (1.7-210bar) Preset:1000psi (70bar)
B=25-1500psi (1.7-105bar) Preset:1000psi (70bar)
C=25-6000psi (1.7-420bar) Preset:1000psi (70bar)
D=25-800 psi (1.7-55bar) Preset:400psi (25bar)
E=25-400 psi (1.7-28bar) Preset:200psi (14bar)
W=25-4500psi (1.7-315bar) Preset:1000psi (70bar)

6 阀块油口 Body Porting

空白 Blank= 不带阀块 None
6T=SAE6
8T=SAE8
2G=G 1/4
3G=G 3/8

安装尺寸 INSTALLATION DIMENSIONS

