



湖南凯恩利液压 Hunan KEL Hydraulic

比例减压阀 KEPR56-35-24ER
Proportional Pressure Reducing Valve


尺寸图
Dimension

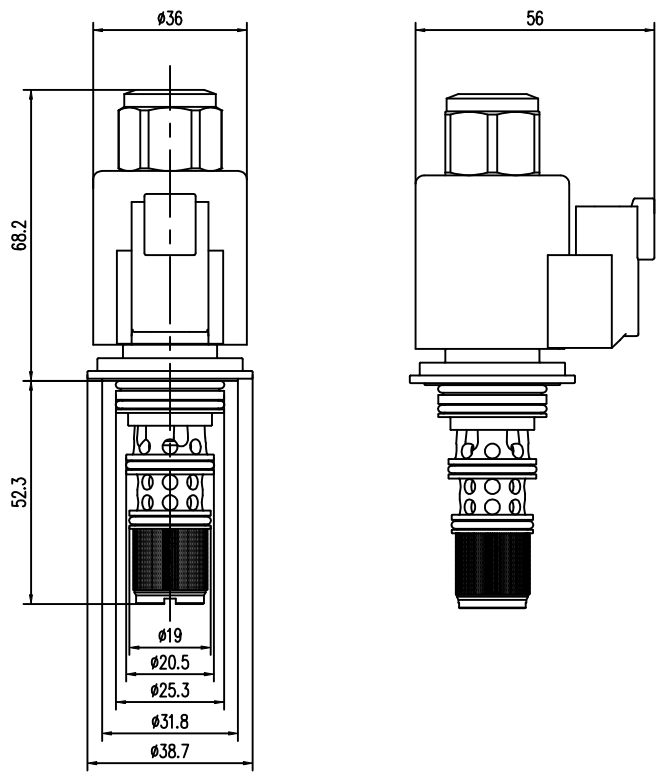

液压原理图
Hydraulic Diagram



压力曲线图
Pressure Characteristic Curve

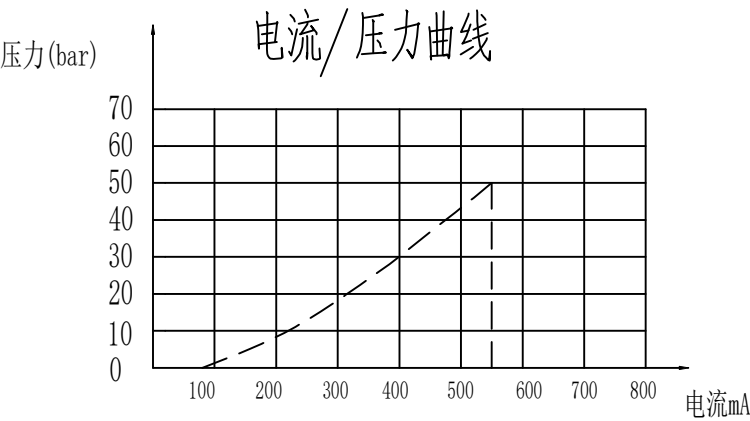


湖南凯恩利液压 Hunan KEL Hydraulic

比例减压阀 KEPR56-35-24ER
Proportional Pressure Reducing Valve

技术参数TECHNICAL DATA

- | | |
|--|---|
| 1. 额定流量: 30L/min
1口最高进口压力: 100Bar | 1. Rated Flow:30L/min
Port 1 Maximum Inlet Pressure:100Bar |
| 2. 电流控制范围: 0-550mA
对应压力输出: 0-50Bar
接口: DT04-2P | 2. Current Control Range: 0-550mA
Corresponding Pressure Output: 0-50Bar
Connector Type:DT04-2P |
| 3. 使用温度范围: -20℃~+90℃; | 3. Operating temp: -20℃~+90℃ |
| 4. 油液清洁度要求: NAS9以内 | 4. Allowable: NAS Class 9 or better |

订货代号 TO ORDER

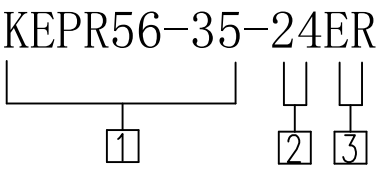

1 公司代号
KEPR56-35=比例减压阀
Proportional Pressure Reducing Valve

2 电压 Rated Voltage
12 =DC 12V
24 =DC 24V

3 ER= Deutsch Connector (Water-proof Coil)
德意志插座 (防水线圈) IP69K
DL= Double Lead 双线
DG= Hirschmann 三插