



湖南凯恩利液压 Hunan KEL Hydraulic

减压阀 KPR58D-38-35
Pressure Reducing Valve



尺寸图
Dimension

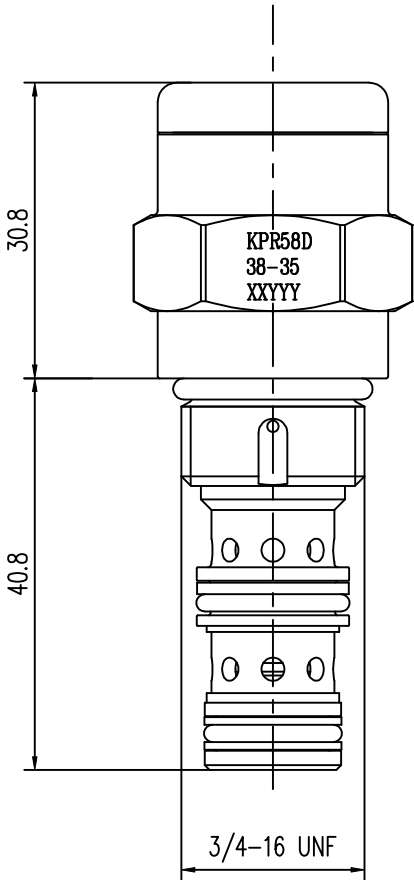

液压原理图
Hydraulic Diagram

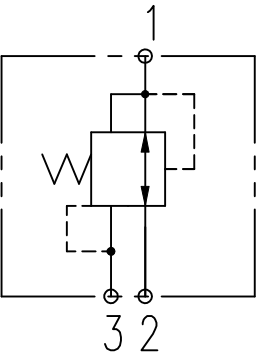

压力-流量曲线
Pressure Drop vs. Flow

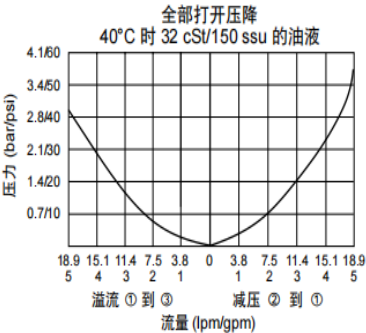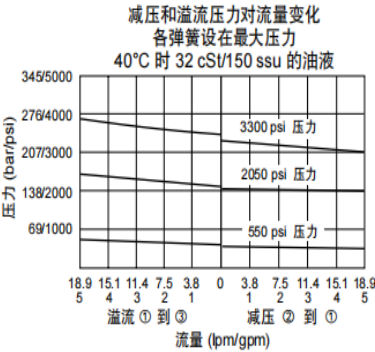

湖南凯恩利液压 Hunan KEL Hydraulic

减压阀 KPR58D-38-35
Pressure Reducing Valve

技术参数TECHNICAL DATA

1. 额定流量: 30L/min
额定压力: 350bar

1. Rated Flow:30L/min
Rated Pressure:350bar

2.减压阀设定压力: 35Bar $\pm$ 2Bar

2. Pressure Reducing Valve Setting Pressure: $35\text{Bar} \pm 2\text{Bar}$

3. 泄露量: 在减压35 bar 时, 小于120ml/Min 3. Leakage: <120 ml/min at 35 bar

4. 使用温度范围: $-20^{\circ}\text{C} \sim +90^{\circ}\text{C}$;

4. Operating temp: -20°C ~ $+90^{\circ}\text{C}$

5. 油液清洁度要求: NAS9 以内

5.Allowable: NAS Class 9 or better

6. 阀孔: VC08-3孔型

6. Port: VC08-3

订货代号 TO ORDER

KPR58D-38-35-*-*

1 2 3 4

① 公司代号
KPR58= 减压阀
Pressure Reducing Valve

② 设定压力Setting Pressure
减压阀设定压力: 35Bar±2Bar

3 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶

4 只定插件
Caetridge Valve