



湖南凯恩利液压 Hunan KEL Hydraulic

单向阀 KCV04-G1-4-04
Check Valve


尺寸图
Dimension

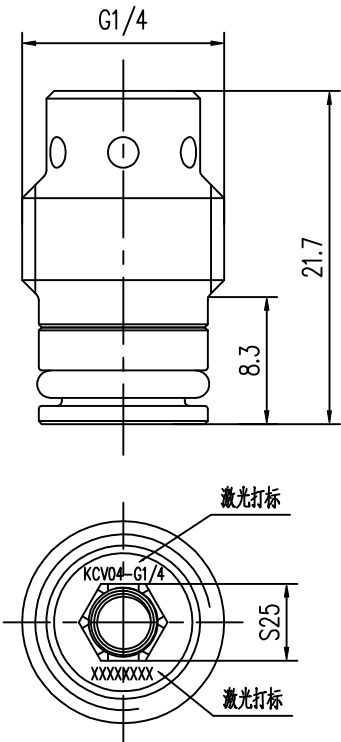

液压原理图
Hydraulic Diagram

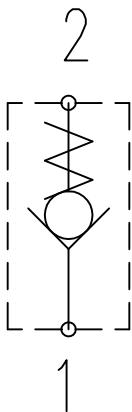

压力-流量曲线
Pressure Drop vs. Flow

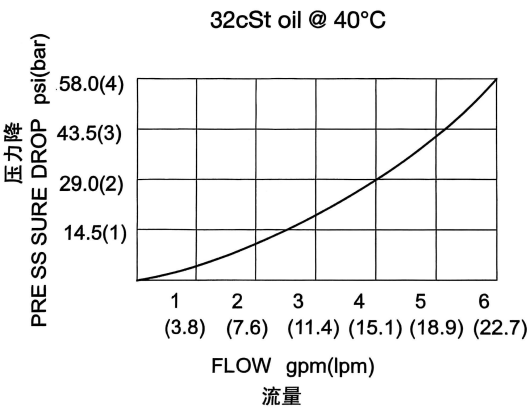


湖南凯恩利液压 Hunan KEL Hydraulic

单向阀 KCV04-G1-4-04
Check Valve

技术参数TECHNICAL DATA

- | | |
|---|---|
| 1. 额定流量: 20L/min
额定压力: 350bar | 1. Rated Flow: 20L/min
Rated Pressure: 350bar |
| 2. 单向阀开启压力: 1.5Bar,
泄露量: 小于3滴/Min, P=50Bar | 2. Check Valve Cracking Pressure: 1.5 bar,
Leakage: <3 drops/min at 50 bar |
| 3. 油液清洁度要求: NAS9以内 | 3. Allowable: NAS Class 9 or better |
| 4. 使用温度范围: -20℃~+90℃; | 4. Operating temp: -20℃~+90℃ |
| 5. 安装插装阀孔型: CV04-G1-4(具体尺寸如下) | 5. Port: CV04-G1-4 |

孔型图 Hole Pattern Drawing

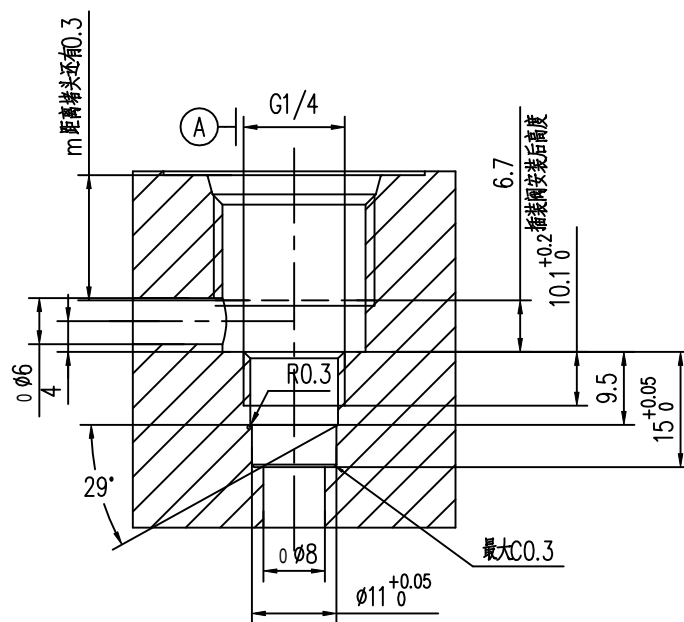

CV04-G1-4孔型