



湖南凯恩利液压 Hunan KEL Hydraulic

溢流阀 KRVBC-08D-50
Pressure Relief Valve


尺寸图
Dimension

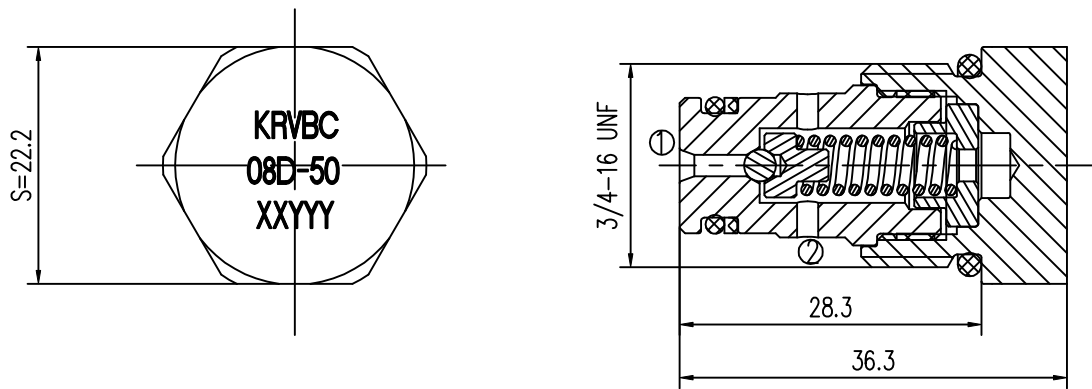

液压原理图
Hydraulic Diagram



压力-流量曲线
Pressure Drop vs. Flow

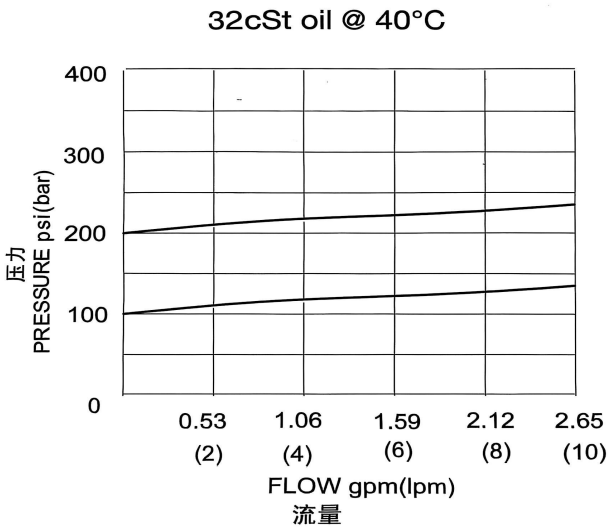


湖南凯恩利液压 Hunan KEL Hydraulic

溢流阀 KRVBC-08D-50
Pressure Relief Valve

技术参数TECHNICAL DATA

- | | |
|---|--|
| 1. 额定流量: 10L/min
额定压力: 240bar | 1. Rated Flow:10L/min
Rated Pressure:240bar |
| 2. 设定压力: 50bar | 2. Setting Pressure:50bar |
| 3. 内泄漏: 5 drops/min(滴/分).
max. to 80% of nominal setting | 3. Leakage:5 drops/min.max. to 80% of
nominal setting |
| 4. 温度: -40° F to +250° F
(-40° C to +120° C) | 4. Operating temp:-40° F to +250° F
(-40° C to +120° C) |
| 5. 油液粘度范围: Mineral-based fluids
with viscosities of
7.4 to 420 cSt. (矿物油粘度) | 5. Hydraulic Fluid Viscosity Range:
Mineral-based fluids with viscosities of
7.4 to 420 cSt. (Mineral Oil Viscosity) |
| 6. 插孔: VC08-2 | 6. Port:VC08-2 |

订货代号 TO ORDER

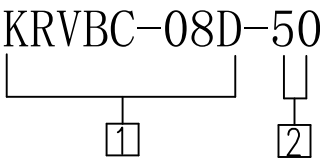

1 公司代号
KRVBC-08D=溢流阀
Pressure Relief Valve

2 设定压力 Setting Pressure
50=50bar