


湖南凯恩利液压 Hunan KEL Hydraulic

减压阀 KPR58L-38A-0-N-6
Pressure Reducing Valve


尺寸图

Dimension

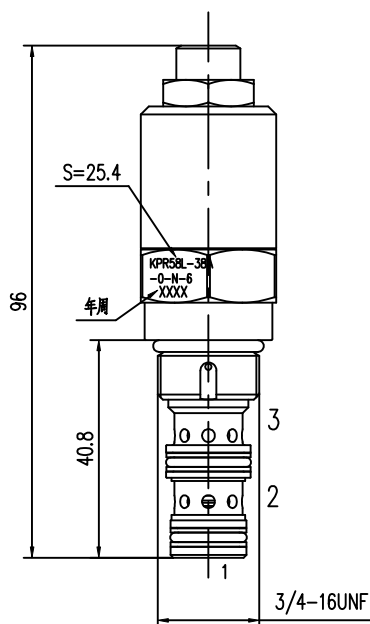



液压原理图

Hydraulic Diagram

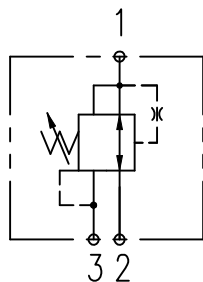

压力-流量曲线

Pressure Drop vs. Flow

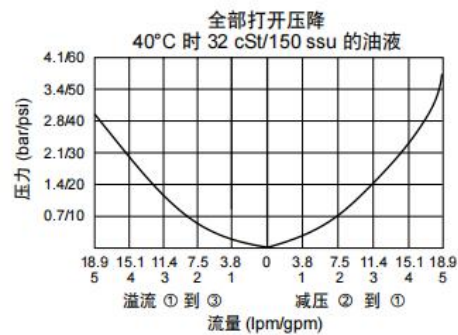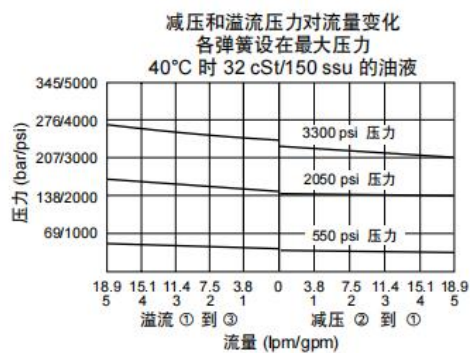


湖南凯恩利液压 Hunan KEL Hydraulic

减压阀 KPR58L-38A-0-N-6
Pressure Reducing Valve

技术参数TECHNICAL DATA

1.工作压力350 bar 耐压: 420 bar	1.Working pressure: 350 bar Proof pressure: 420 bar
2.内泄漏: ②流向③, 82 ml/min, P=207 bar时	2.Internal leakage (Port ②→③): 82 ml/min at 207 bar
3.油液: 粘度为7.4~420 cSt的矿物基液压油	3.Fluid: Mineral-based hydraulic oil with viscosity of 7.4 - 420 cSt
4.使用温度范围: -40° F to +250° F (-40° C to +120° C)	4.Operating temp: -40° F to +250° F (-40° C to +120° C)
5.阀孔: VC08-3孔型	5.Port:VC08-3
6.减压范围: 13bar--62bar	6.Pressure Reduction Range:13bar--62bar
7.出厂设定: 35bar	7.Factory Setting: 35bar

订货代号 TO ORDER

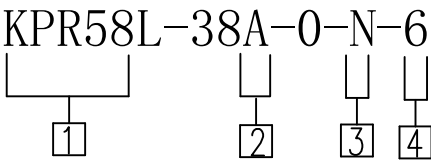

1 公司代号 KPR58L= 减压阀 Pressure Reducing Valve	2 A S5寸内六角头 B 直径1-1/2 寸, 铝合金手柄 C 选件A, 带螺帽盖
3 油封 Seal Kits N= 丁腈橡胶 NBR F= 氟橡胶 FKM	4 压力范围 Pressure Range 3 3.4 到 20.7bar 6 18 到 50 bar 22 34.5 到 151.7 bar