



湖南凯恩利液压 Hunan KEL Hydraulic

溢流阀 KRV-S08-G
Pressure Relief Valve


尺寸图
Dimension

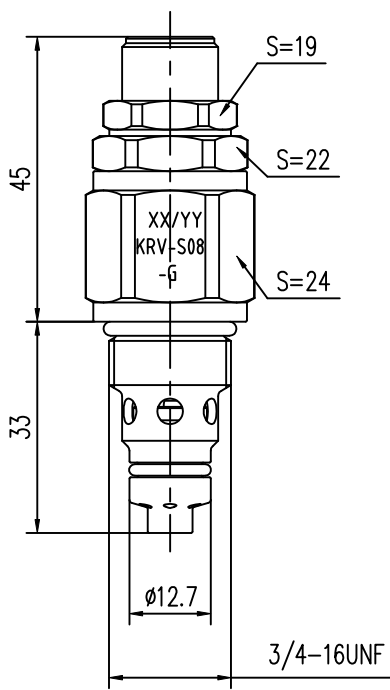

液压原理图
Hydraulic Diagram



压力-流量曲线
Pressure Drop vs. Flow

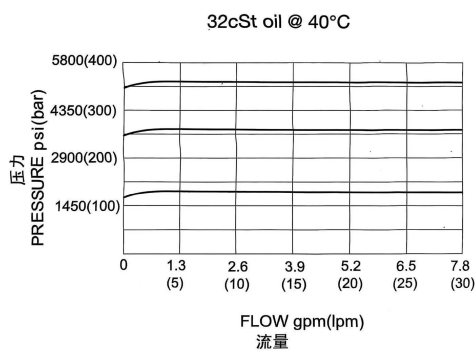


湖南凯恩利液压 Hunan KEL Hydraulic

溢流阀 KRV-S08-G
Pressure Relief Valve

技术参数TECHNICAL DATA

1. 额定流量：30L/min 额定压力：350bar	1. Rated Flow:30L/min Rated Pressure:350bar
2. 调压范围：120-350bar	2. Pressure Setting Range: 120-350bar
3. 泄漏量：2口在 10 bar时，最大5滴/分钟	3. Leakage: Port 2 leakage: Max. 5 drops/min at 10 bar
4. 泄漏量：2口在 10 bar时，最大5滴/分钟	4. Leakage: Port 2 leakage: Max. 5 drops/min at 10 bar
5. 油液粘度范围：粘度介于7.4~420 cSt (50~2000 ssu) 的 矿物油或具有润滑作用的合成油	5. Hydraulic Fluid Viscosity Range: Mineral oil or lubricating synthetic oil with viscosity ranging from 7.4 to 420 cSt (50 to 2000 SSU)
6. 温度：-20℃- +90℃	6. Operating temp:-20℃- +90℃
7. 插孔：VC08-2	7. Port:VC08-2

订货代号 TO ORDER

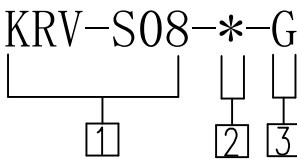

公司代号

KRV-S08=溢流阀

1 Pressure Relief Valve

2 油封 Seal Kits

N=丁腈橡胶

F=氟橡胶

3 压力范围 Pressure Range

Y 15 到 60 bar

B 50 到 220 bar

G 120 到 350 bar