



湖南凯恩利液压 Hunan KEL Hydraulic

比例减压阀 KPPCD05-004-a-K-30-24-D-FKM-0
Proportional Pressure Reducing Valve


尺寸图
Dimension

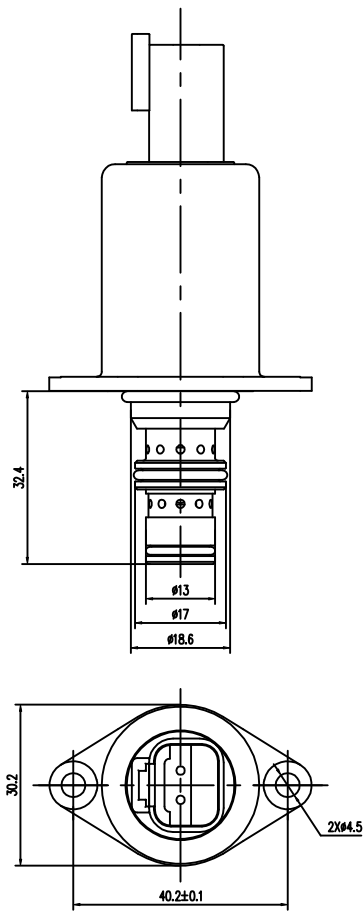

液压原理图
Hydraulic Diagram



压力曲线图
Pressure Characteristic Curve

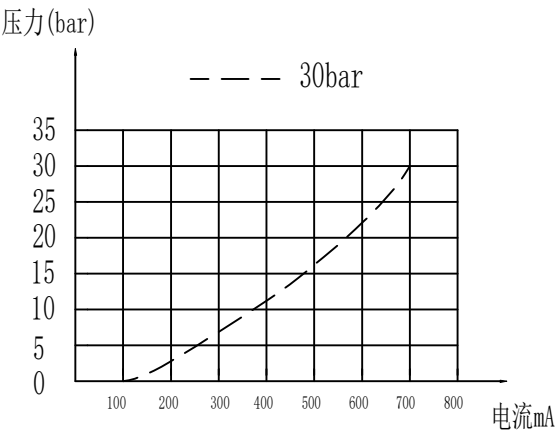

湖南凯恩利液压 Hunan KEL Hydraulic


比例减压阀 KPPCD05-004-a-K-30-24-D-FKM-0
Proportional Pressure Reducing Valve

技术参数TECHNICAL DATA

- | | |
|---|---|
| 1. 额定流量: 15L/Min
2口额定压力: 60Bar | 1. Rated Flow: 15L/Min
Port 2 Rated Pressure: 60Bar |
| 2. 电压: DC24V
接口: DT04-2P | 2. Voltage: DC24V
Connector: DT04-2P |
| 3. 电流控制范围: 0-700mA,
对应压力输出: 0-30Bar; | 3. Current Control Range: 0-700mA,
Corresponding Pressure Output: 0-30Bar; |
| 4. 泄露量: 在 35 bar 时,
最大为 30 ml/min以内; | 4. Leakage: Max. 30 ml/min at 35 bar |
| 5. 插孔: TC05013 孔型 | 5. Port: TC05013 |
| 6. 使用温度范围: -20℃-+90℃ | 6. Operating temp: -20℃-+90℃ |
| 7. 油液清洁度要求: NAS9以内 | 7. Allowable: NAS Class 9 or better |

孔型图


Hole Pattern Drawing

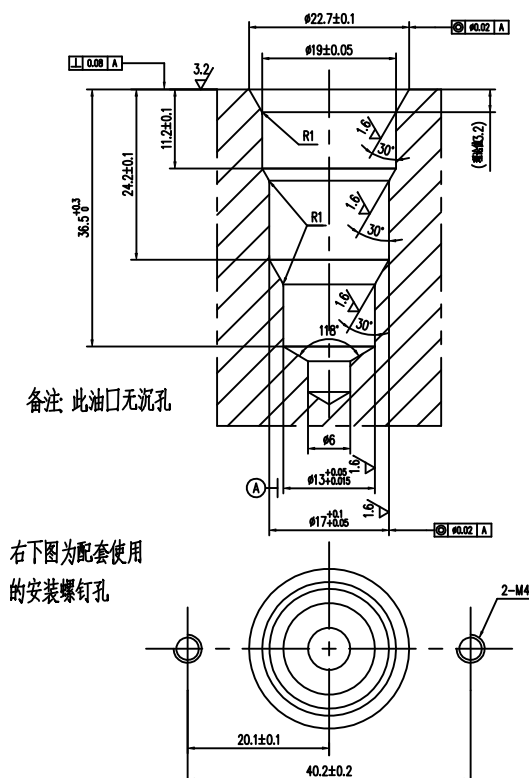

湖南凯恩利液压 Hunan KEL Hydraulic

比例减压阀 KPPCD05-004-a-K-30-24-D-FKM-0
Proportional Pressure Reducing Valve

订货代号 TO ORDER

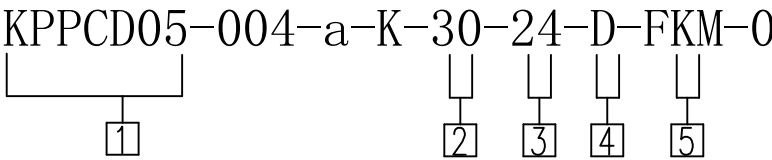

1 公司代号
KPPCD05= 比例减压阀
Proportional Pressure Reducing Valve

4 连接器Connector:
D=Deutsch
德驰插头 DT04-2P

2 控制压力范围
Control pressure range: 30bar

5 密封材料 Seal material

3 电压 Rated Voltage
12 =DC 12V
24 =DC 24V

F= FKM氟素橡胶