



湖南凯恩利液压 Hunan KEL Hydraulic

电磁阀插芯 KSV08-58C-0-N
Solenoid Valve Spool


尺寸图
Dimension

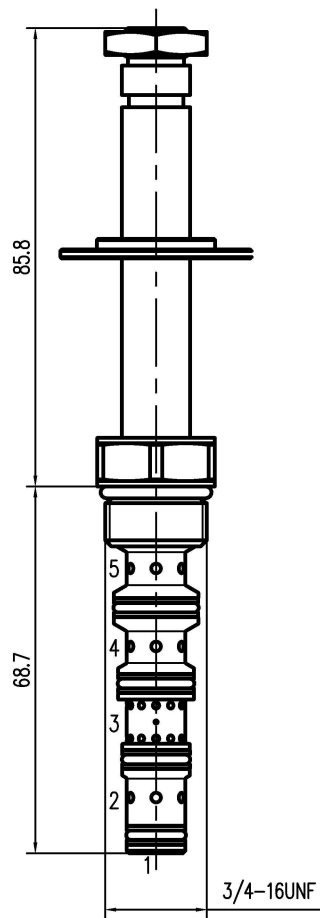

液压原理图
Hydraulic Diagram



性能曲线图
Performance Characteristic Curve

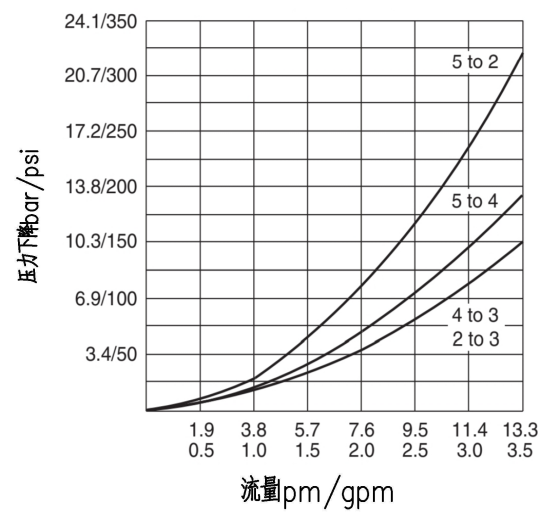

湖南凯恩利液压 Hunan KEL Hydraulic

电磁阀插芯 KSV08-58C-0-N
Solenoid Valve Spool

技术参数TECHNICAL DATA

1. 最大流量: 13.3L/min
额定压力: 210Bar

1. Maximum Flow Rate:13.3L/min
Rated Pressure:210Bar
2. 内泄露: 在 207 bar 下,
小于197ml/min;

2. Internal Leakage:Less than 197 ml/min
at 207 bar
3. 安装扭矩: 27N.m


3. Mounting torque: 27 N.m
4. 插孔: VC08-5

4. Port: VC08-5
5. 介质: 粘度介于7.4~420cSt (50~2000sus)
的矿物油或具有润滑作用的合成油

5. Fluid: Mineral oil or lubricating synthetic
7.4 - 420 oil with viscosity between
cSt (50 - 2000 sus)

孔型图


Hole Pattern Drawing

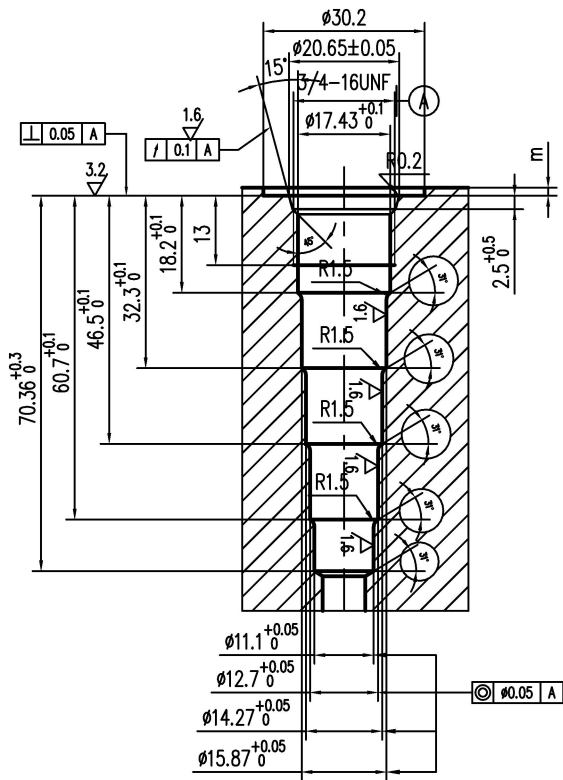

湖南凯恩利液压 Hunan KEL Hydraulic

电磁阀插芯 KSV08-58C-0-N
Solenoid Valve Spool

订货代号 TO ORDER

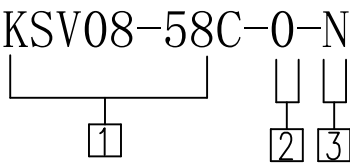

1 公司代号
KSV08-58C= 电磁阀插芯
Solenoid Valve Spool

2 0 =只定插件
Cartridge Valve

3 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶