



湖南凯恩利液压 Hunan KEL Hydraulic

三位五通电磁阀 KSV10-58C-0-N-12ER
3-Position, 5-Way Solenoid Valve


尺寸图
Dimension

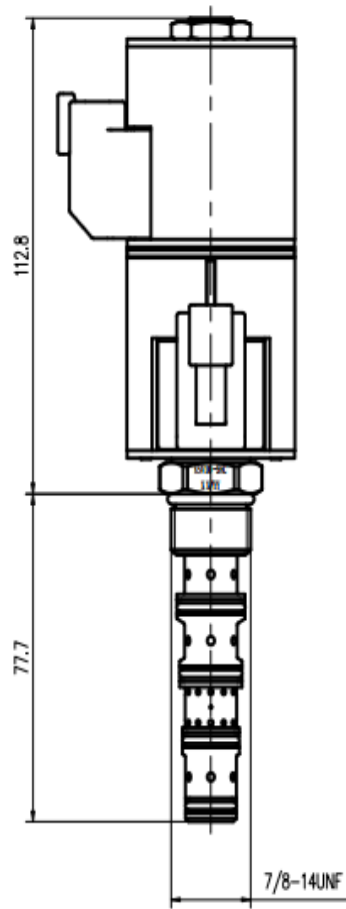

液压原理图
Hydraulic Diagram

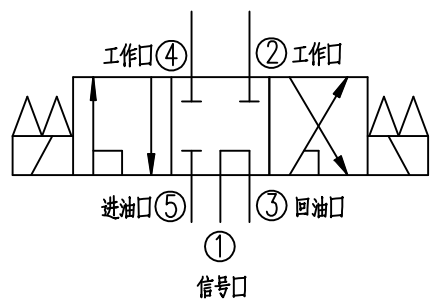

性能曲线图
Performance Characteristic Curve

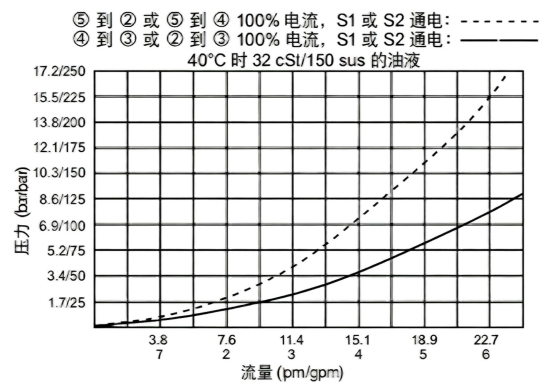

湖南凯恩利液压 Hunan KEL Hydraulic

三位五通电磁阀 KSV10-58C-0-N-12ER
3-Position, 5-Way Solenoid Valve

技术参数TECHNICAL DATA

1. 最大流量: 20.8L/min
额定压力: 250Bar

2. 泄露量: 在 207 bar下,
小于246ml/min;

3. 安装扭矩: 27N.m

4. 插孔: VC10-5

5. 介质: 粘度介于7.4~420cSt (50~2000sus)
的矿物油或具有润滑作用的合成油
1. Maximum Flow Rate:20.8L/min
Rated Pressure:250Bar

2. Leakage: Less than 246ml/min
at 207 bar;


3. Mounting torque: 27 N.m

4. Port: VC10-5

5. Fluid: Mineral oil or lubricating synthetic
7.4-420 oil with viscosity between
cSt (50-2000 sus)

孔型图


Hole Pattern Drawing

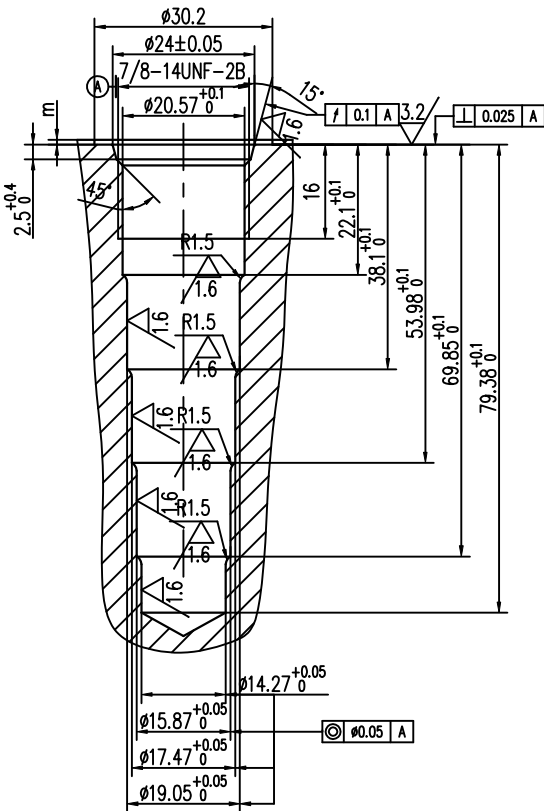

湖南凯恩利液压 Hunan KEL Hydraulic

三位五通电磁阀 KSV10-58C-0-N-12ER
3-Position, 5-Way Solenoid Valve

订货代号 TO ORDER

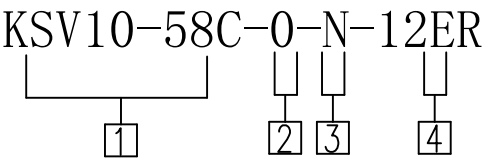

1 公司代号
KSV08-58C= 电磁阀插芯
Solenoid Valve Spool

2 0 =只定插件
Cartridge Valve

3 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶

4 电线圈连接 Coil Connection
ER= Deutsch Connector (Water-proof Coil)
德意志插座 (防水线圈) IP69
DG=Hirschmann 三插
DL= Double Lead 双线