



湖南凯恩利液压 Hunan KEL Hydraulic

三位四通电磁阀 KSV10-47C-0-N
3-Position, 4-Way Solenoid Valve


尺寸图
Dimension

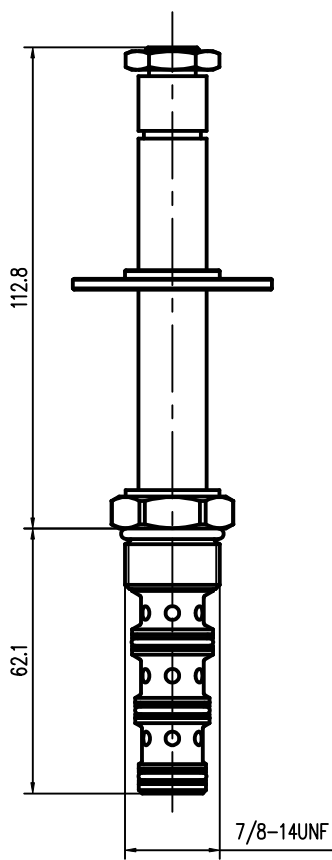

液压原理图
Hydraulic Diagram

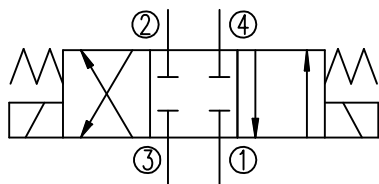

性能曲线图
Performance Characteristic Curve

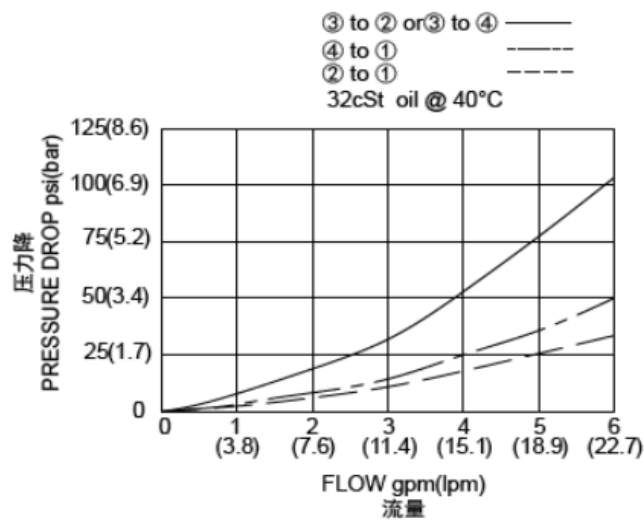

湖南凯恩利液压 Hunan KEL Hydraulic


三位四通电磁阀 KSV10-47C-0-N
3-Position, 4-Way Solenoid Valve

技术参数TECHNICAL DATA

- | | |
|--|---|
| 1. 最大流量: 23L/min
额定压力: 207Bar | 1. Maximum Flow Rate: 23L/min
Rated Pressure: 207Bar |
| 2. 泄露量: 在 207 bar 下,
小于 164 ml/min; | 2. Leakage: Less than 164ml/min
at 207 bar; |
| 3. 安装扭矩: 33 N.m | 3. Mounting Torque: 33 N.m |
| 4. 插孔: VC10-4 | 4. Port: VC10-4 |
| 5. 介质: 粘度介于 7.4~420cSt (50~2000sus)
的矿物油或具有润滑作用的合成油 | 5. Fluid: Mineral oil or lubricating synthetic
7.4 - 420 oil with viscosity between
cSt (50 - 2000 sus) |

孔型图


Hole Pattern Drawing

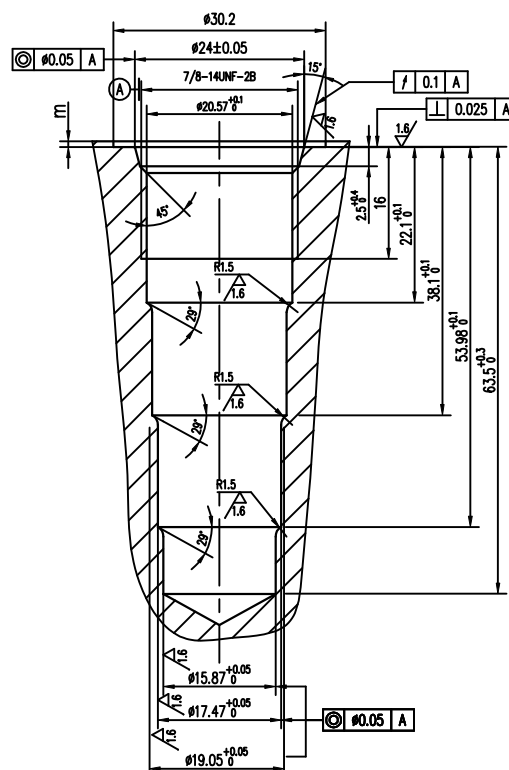

湖南凯恩利液压 Hunan KEL Hydraulic

三位四通电磁阀 KSV10-47C-0-N
3-Position, 4-Way Solenoid Valve

订货代号 TO ORDER

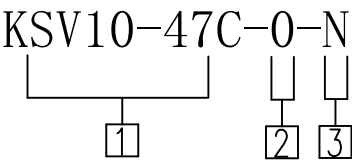

1 公司代号
KSV10-47C = 电磁阀
Solenoid Valve

2 0 = 只定插件
Cartridge Valve

3 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶