



湖南凯恩利液压 Hunan KEL Hydraulic

减压阀 KPR08L-32A-0-N-10
Pressure Reducing Valve

尺寸图
Dimension

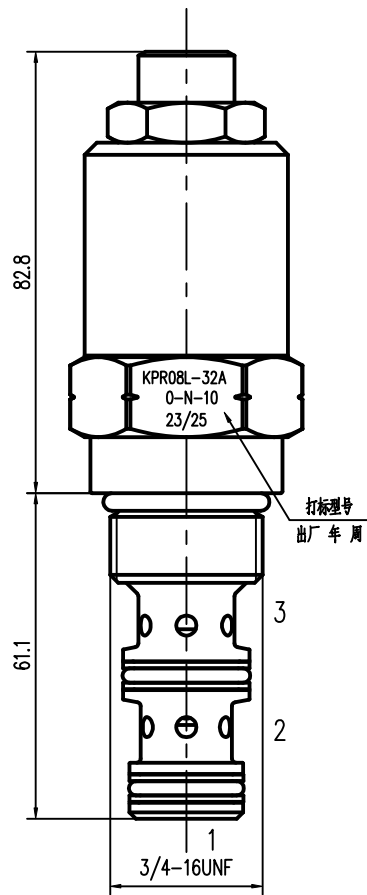


液压原理图
Hydraulic Diagram

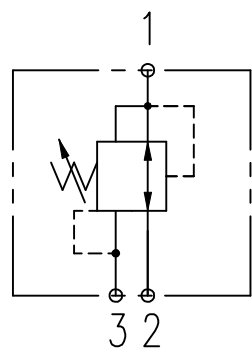

性能曲线图
Performance Characteristic Curve

压力 - 流量曲线 PRESSURE DROP VS.FLOW

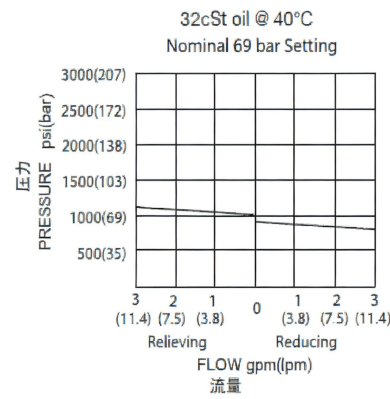

湖南凯恩利液压 Hunan KEL Hydraulic

减压阀 KPRO8L-32A-0-N-10
Pressure Reducing Valve

技术参数TECHNICAL DATA

1. 最高进油口压力: 250 bar

1. Maximum Inlet Oil Pressure:250 bar
2. 出厂设定: 在进口压力160bar下
出厂设定50-52bar;


2. Factory Setting: Under an inlet pressure of 160 bar,
the factory setting is 50-52 bar;
3. 插孔: VC08-30

3. Port: VC08-30
4. 介质: 粘度介于7.4~420cSt (50~2000sus)
的矿物油或具有润滑作用的合成油

4. Fluid: Mineral oil or lubricating synthetic
7.4 - 420 oil with viscosity between
cSt (50 - 2000 sus)

孔型图


Hole Pattern Drawing

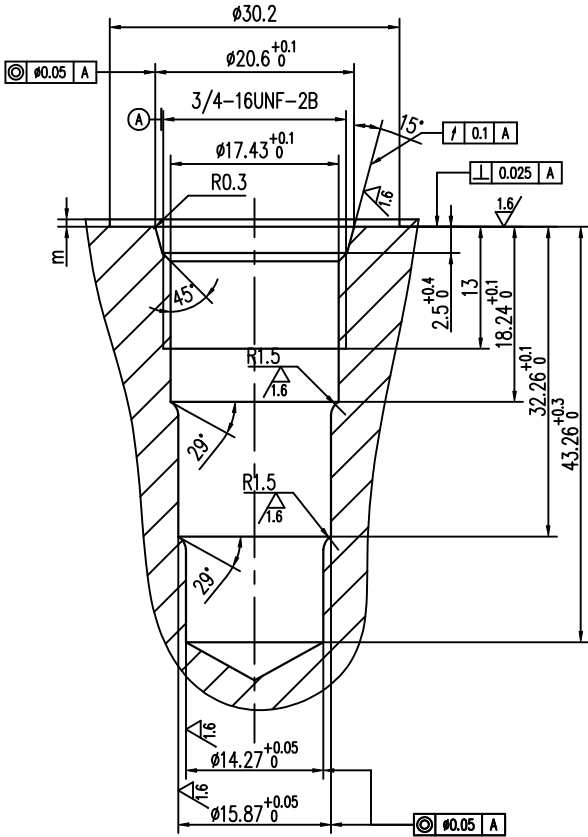

湖南凯恩利液压 Hunan KEL Hydraulic

减压阀 KPR08L-32A-0-N-10
Pressure Reducing Valve

订货代号 TO ORDER

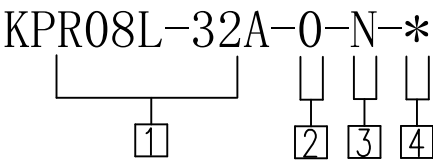

1 公司代号
KPR08L-32A= 减压阀
Solenoid Valve

2 0 =只定插件
Cartridge Valve

3 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶

4 压力范围 Pressure Range
3 3.4 到 20.7bar
6 18 到 50 bar
22 34.5 到 151.7 bar