



湖南凯恩利液压 Hunan KEL Hydraulic

液控逻辑阀 KEP10-S35T-0-V-290
Pilot-Operated Logic Valve


尺寸图
Dimension

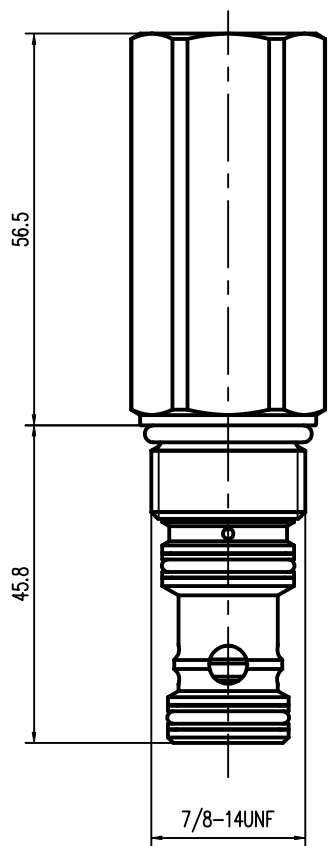

液压原理图
Hydraulic Diagram



性能曲线图
Performance Characteristic Curve

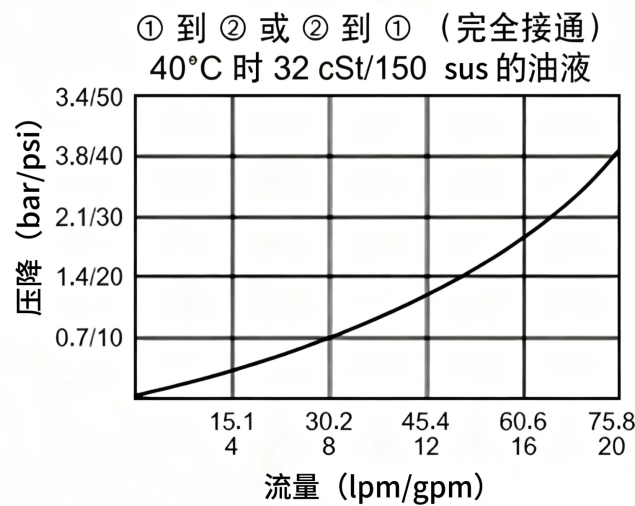

湖南凯恩利液压 Hunan KEL Hydraulic


液控逻辑阀 KEP10-S35T-0-V-290
Pilot-Operated Logic Valve

技术参数TECHNICAL DATA

- | | |
|--------------------------------------|---|
| 1. 额定流量: 75L/min
额定压力: 350Bar | 1. Rated Flow Rate: 75L/min
Rated Pressure: 350Bar |
| 2. 泄露量: 在 207 bar下,
小于164 ml/min; | 2. Leakage: Less than 246ml/min
at 207 bar; |
| 3. 开启压力: 20 bar | 3. Cracking Pressure: 20 bar |
| 4. 插孔: VC10-3S | 4. Port: VC10-3S |
| 5. 安装扭矩: 33 N.m | 3. Mounting Torque: 33 N.m |

孔型图


Hole Pattern Drawing

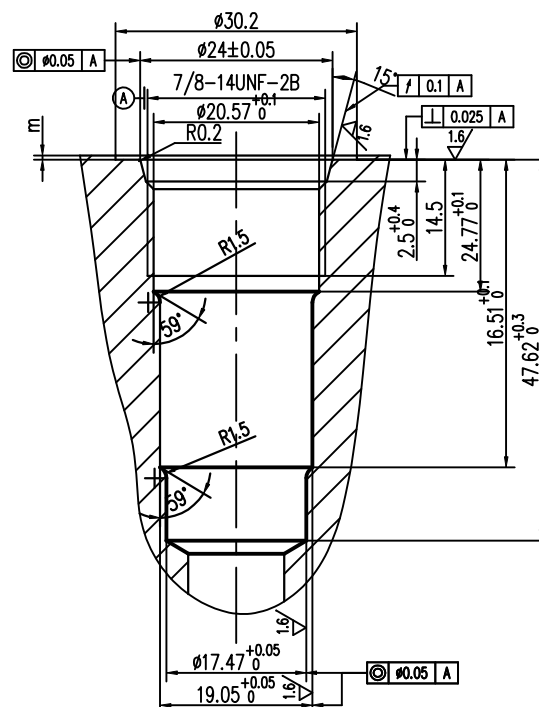

湖南凯恩利液压 Hunan KEL Hydraulic

液控逻辑阀 KEP10-S35T-0-V-290
Pilot-Operated Logic Valve

订货代号 TO ORDER

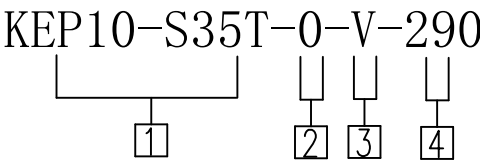

1 公司代号
KER10-S35T= 液控逻辑阀
Solenoid Valve

2 0 =只定插件
Cartridge Valve

3 密封材料SEALING MATERIAL
丁腈橡胶 (标准型) N
氟橡胶 V
聚氨酯橡胶 P

4 弹簧调压 Spring Ranges
10=0.7bar(10 psi)
40=2.8bar(40 psi)
80=5.5bar(80 psi)
110=7.6bar(110 psi)
150=10.3bar(150 psi)
290=20barbar(290 psi)