


湖南凯恩利液压 Hunan KEL Hydraulic

压力补偿阀 KEP12-30-0-N-100
Pressure Compensated Valve


尺寸图

Dimension

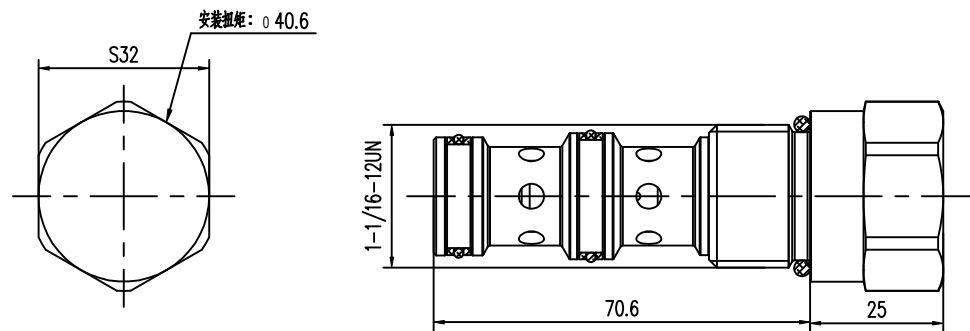


液压原理图

Hydraulic Diagram

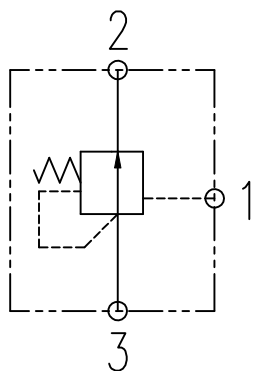

性能曲线图

Performance Characteristic Curve

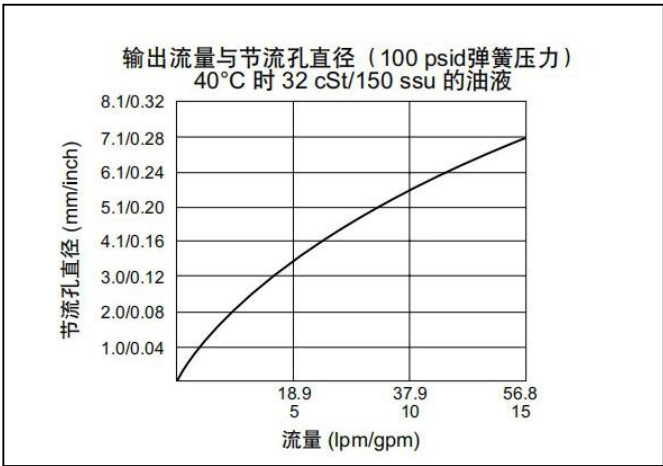

湖南凯恩利液压 Hunan KEL Hydraulic

压力补偿阀 KEP12-30-0-N-100
Pressure Compensated Valve

技术参数TECHNICAL DATA

1. 额定流量: 57L/min
额定压力: 240Bar

2. 泄露量: 在 210 bar下,
小于400 ml/min;

3. 安装扭矩: Max 40.6 N.m

4. 插孔: VC12-3

5. 介质: 粘度介于7.4~420cSt (50~2000sus)
的矿物油或具有润滑作用的合成油
1. Rate Flow:57L/min
Rated Pressure:240Bar

2. Leakage:Less than 400 ml/min
at 210 bar;


3. Mounting Torque: Max 40.6 N.m

4. Port: VC12-3

5. Fluid: Mineral oil or lubricating synthetic
7.4 - 420 oil with viscosity between
cSt (50 - 2000 sus)

孔型图


Hole Pattern Drawing

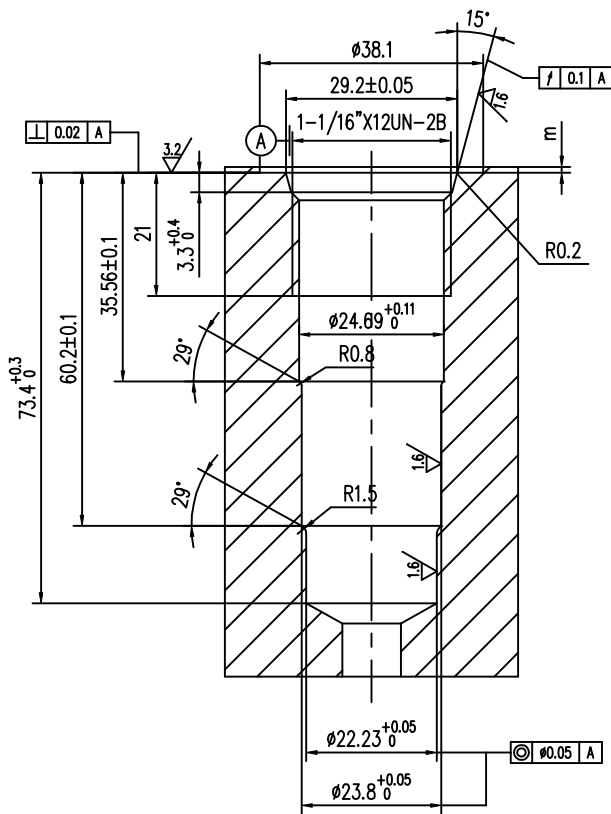

湖南凯恩利液压 Hunan KEL Hydraulic

压力补偿阀 KEP12-30-0-N-100
Pressure Compensated Valve

订货代号 TO ORDER

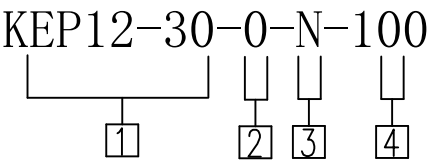

1 公司代号
KEP12-30 = 压力补偿阀
Pressure Compensated Valve

2 0 = 只定插件
Cartridge Valve

3 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶

4 补偿压力
100=6.9 bar
160=11.0 bar