


湖南凯恩利液压 Hunan KEL Hydraulic

反比例溢流阀 KRBAN-XWN
Inverse Proportional Relief Valve


尺寸图

Dimension

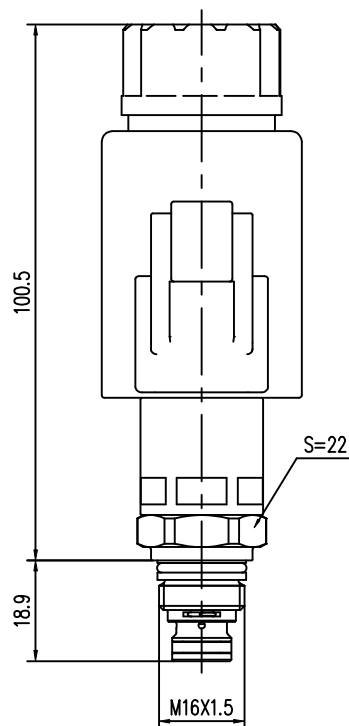


液压原理图

Hydraulic Diagram



压力曲线图

Pressure Characteristic Curve

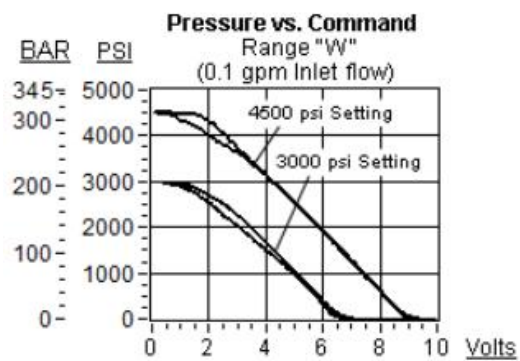

湖南凯恩利液压 Hunan KEL Hydraulic

反比例溢流阀 KRBAN-XWN
Inverse Proportional Relief Valve

技术参数TECHNICAL DATA

1. 额定压力: 350bar
额定流量: 1L/min

2. 控制压力范围: 35-350bar

3. 插孔: T-8A


4. 使用温度: -20℃- +90℃
1. Rated Pressure:350bar
Rated Flow:1L/min

2. Control Pressure Range:35-350bar

3. Port:T-8A

4. Operating temp: -20℃- +90℃

订货代号 TO ORDER



1 公司代号

KRBAN= 反比例溢流阀
Inverse Proportional Relife Valve

2 控制方式 Control

无手动操控

3 调节范围 Adjustment Range

A=3000-1500 psi(105-210bar)
B=1500-800 psi(55-105 bar)
D=800 - 300 psi (20- 55 bar)
W=5000-3000 psi(210-350bar)

4 油封 Seal Kits

N=丁腈橡胶
F=氟橡胶